

Fig 1b

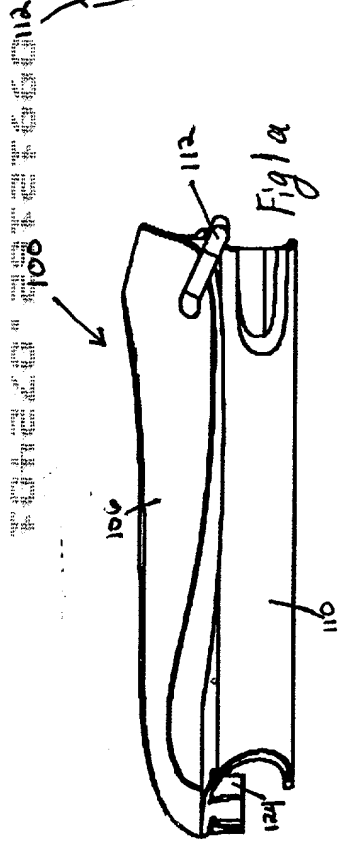


Fig 1a

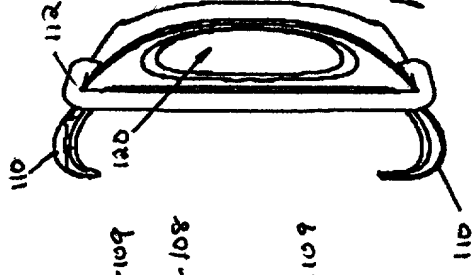


Fig 1e

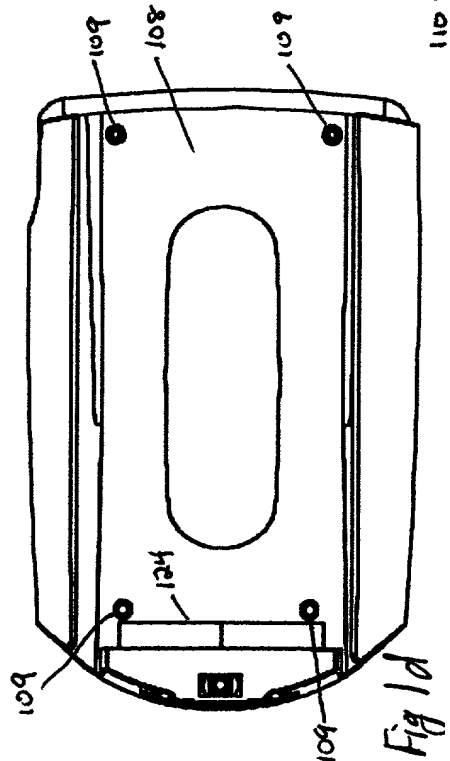


Fig 1d

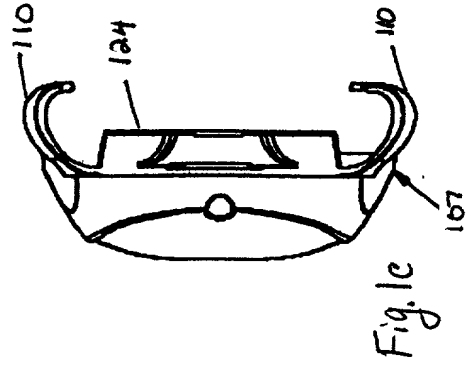


Fig. 1c

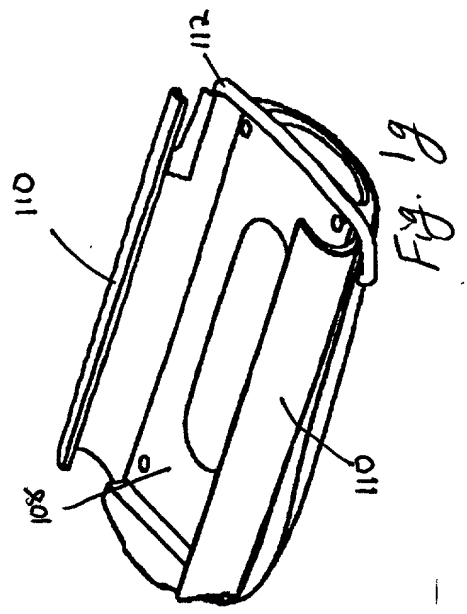


Fig. 1g

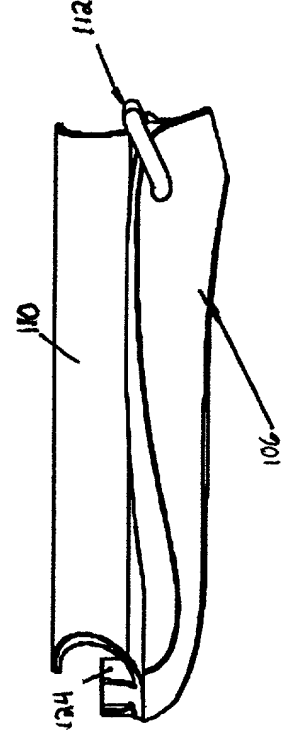
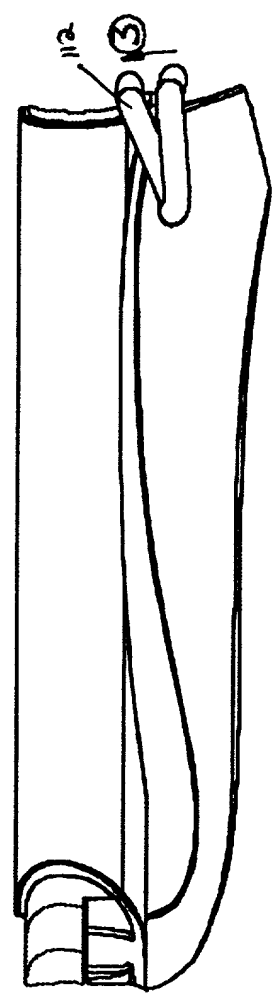
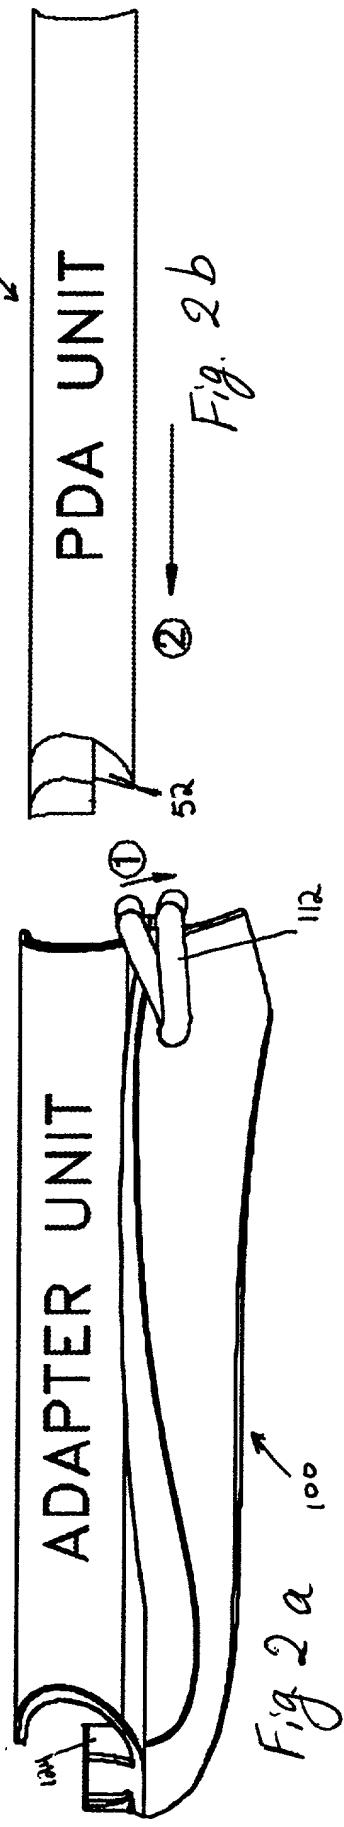


Fig 1f





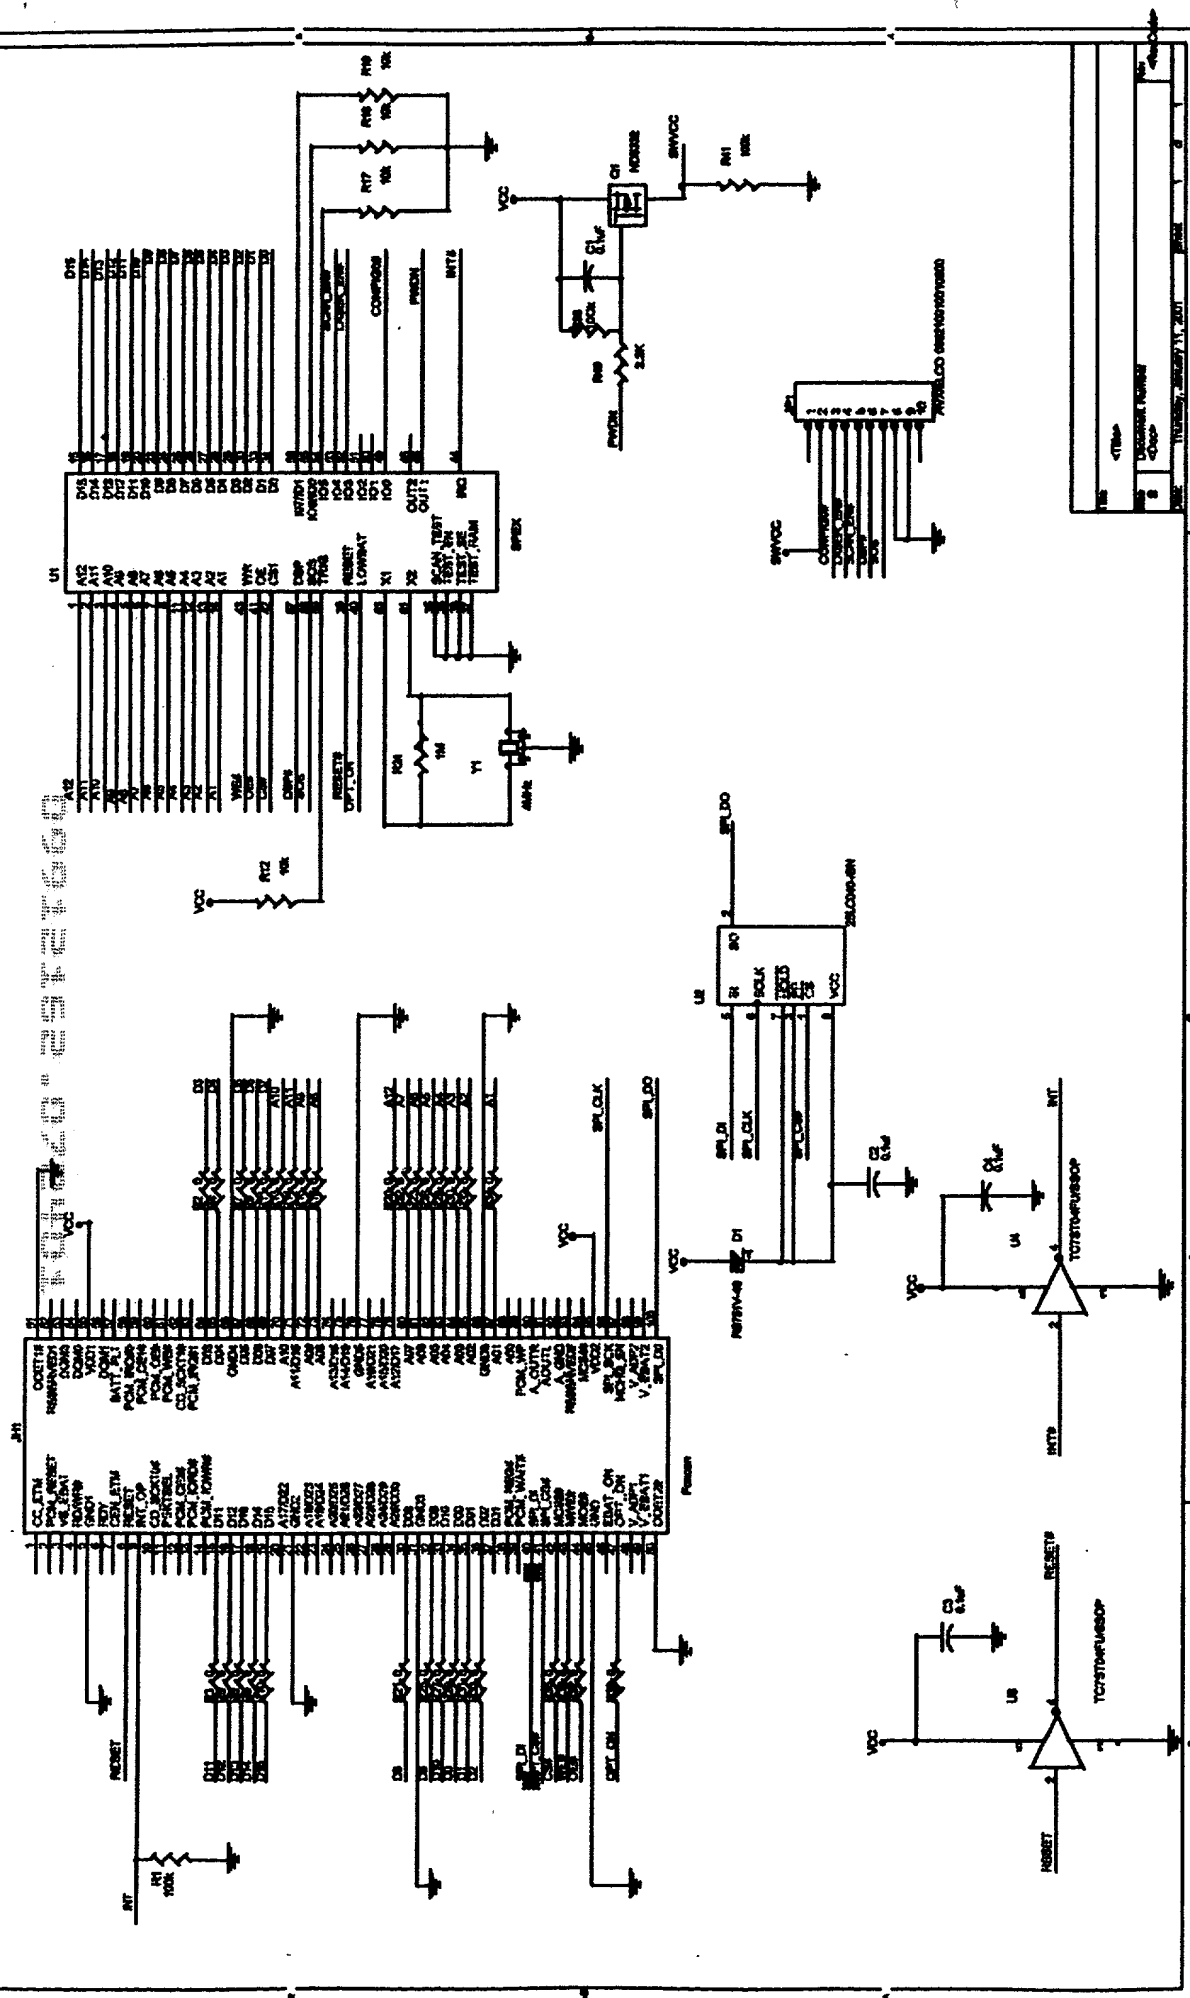


Fig 3

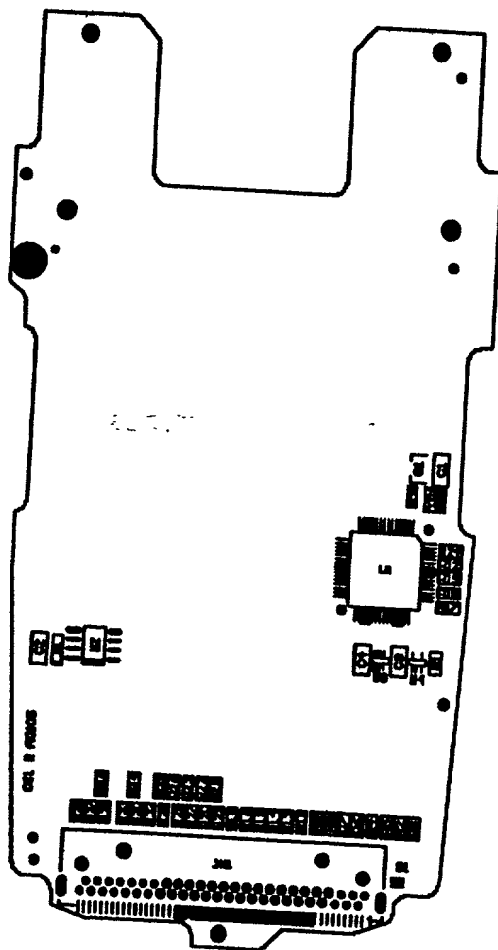

PRIMARY SIDE VIEW

Fig. 4A

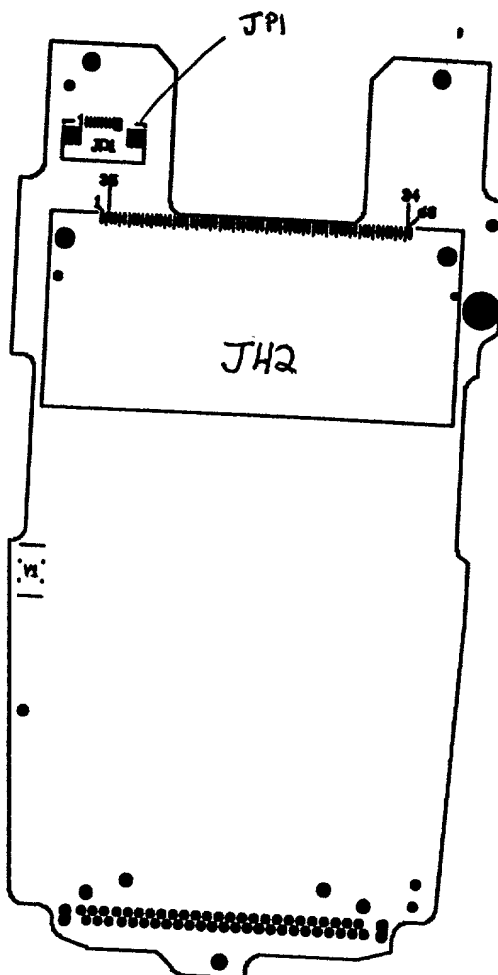

SECONDARY SIDE VIEW

Fig. 4B

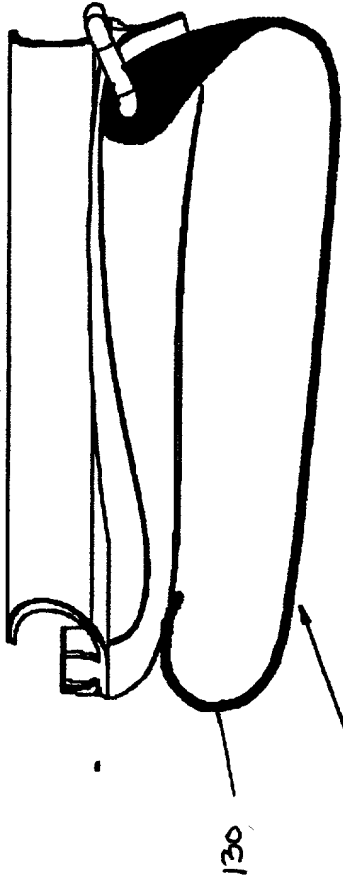


Fig. 5

FLEXIBLE STRAP FOR USER HANDLING SECURITY

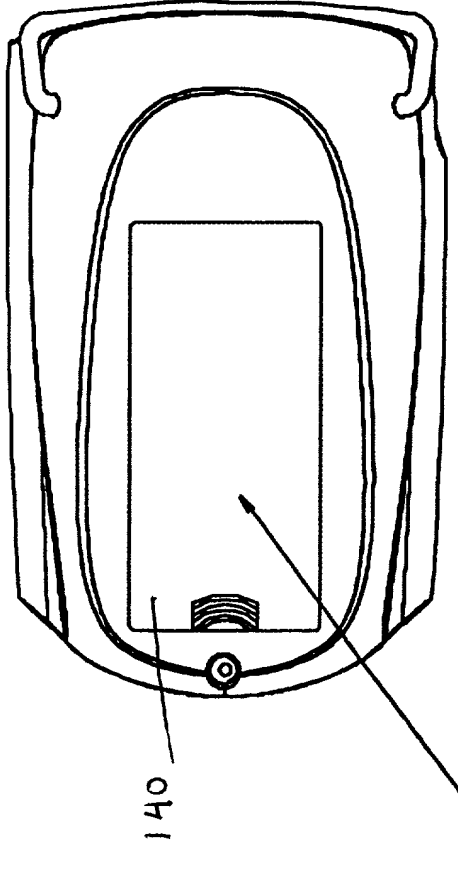



Fig. 6

REMOVABLE/RECHARGABLE BATTERY PACK

PDA SCANNING ADAPTER UNIT FEATURES

FIG. 7 is a perspective view of the PDA scanning adapter unit 100, showing the high capacity rechargeable battery 156 in the handle 150, and the optional handle grip 152 with scan trigger 154.

HIGH CAPACITY RECHARGEABLE BATTERY IN HANDLE


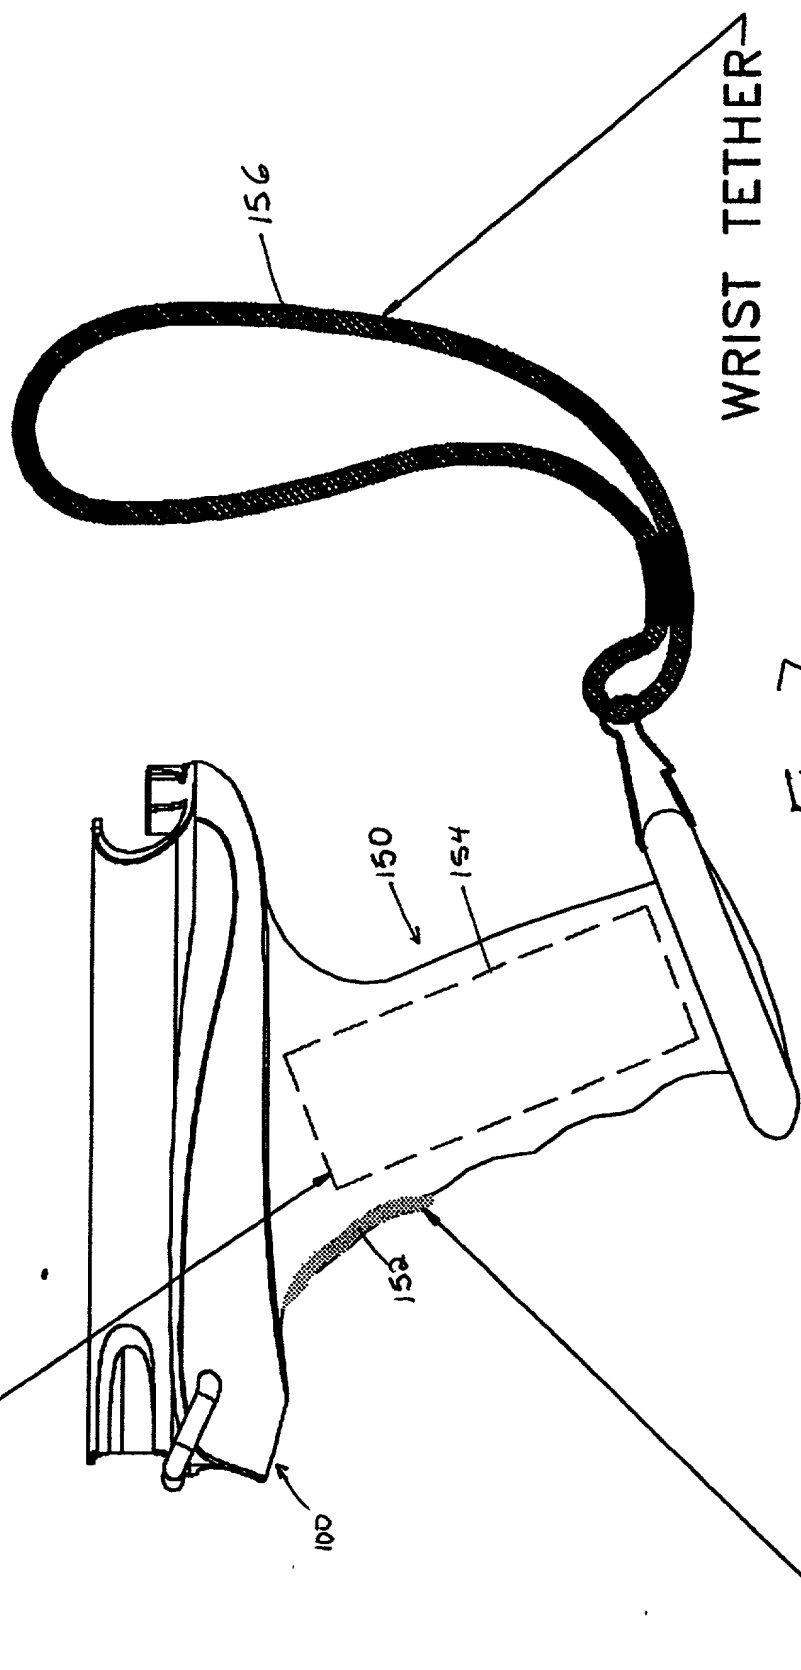


WRIST TETHER

Fig. 7

OPTIONAL HANDLE GRIP W/SCAN TRIGGER

PDA SCANNING ADAPTER UNIT FEATURES

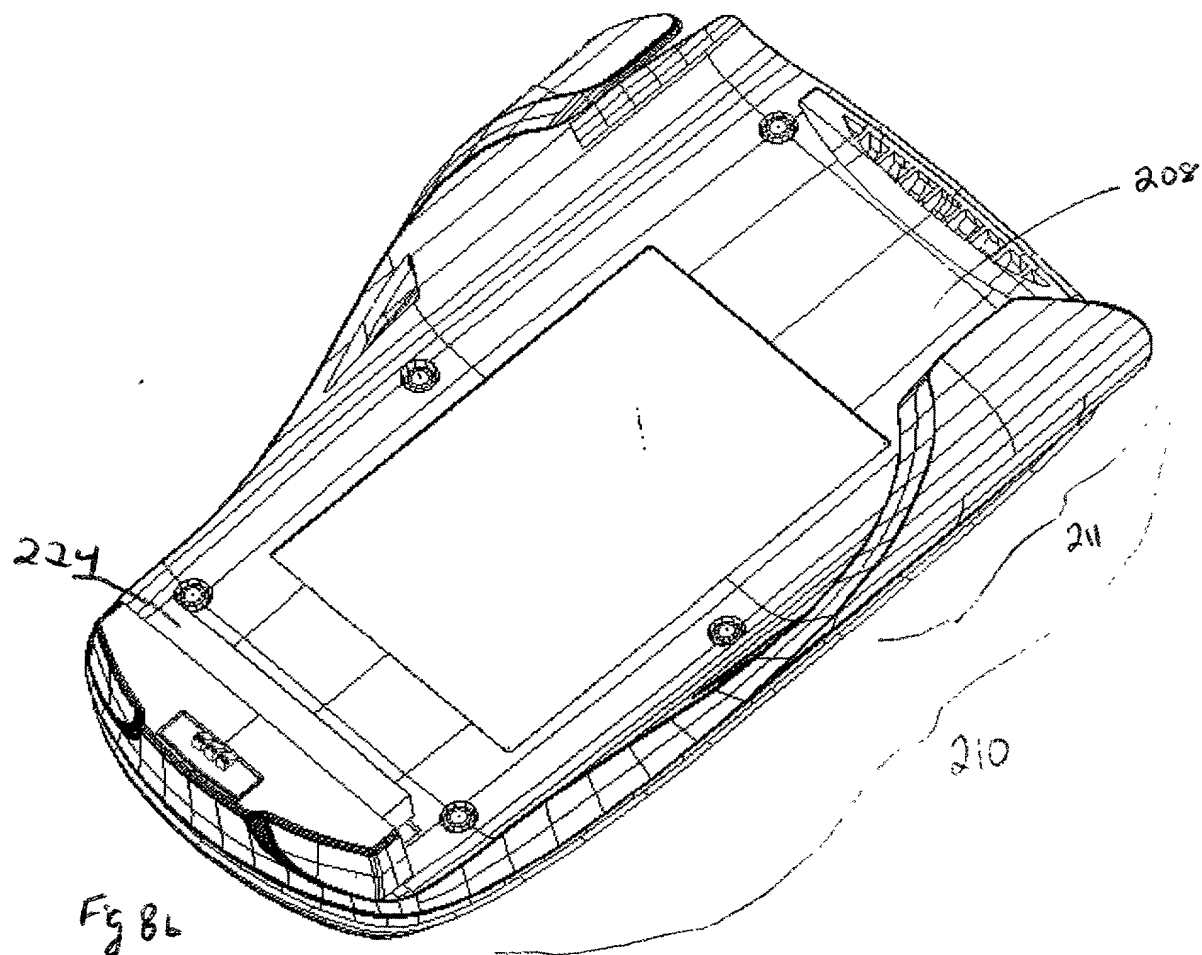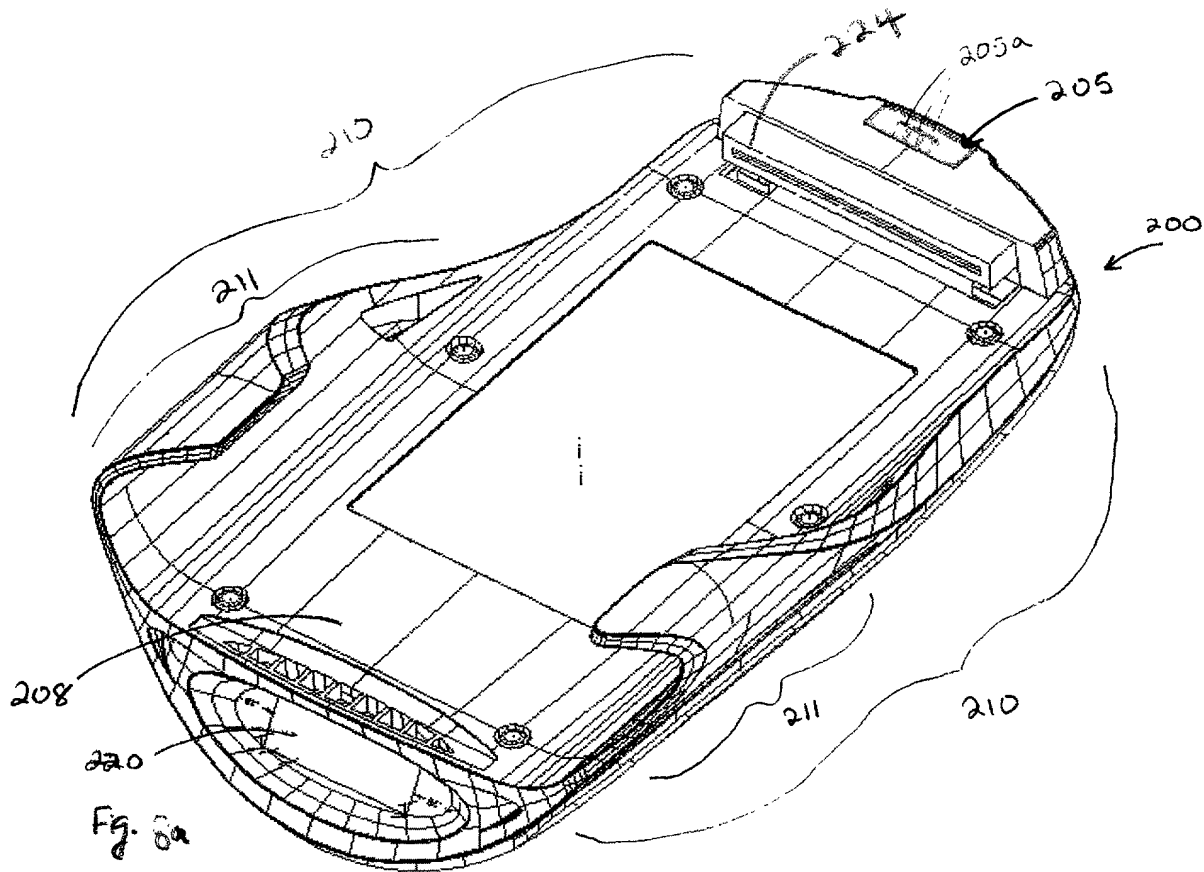

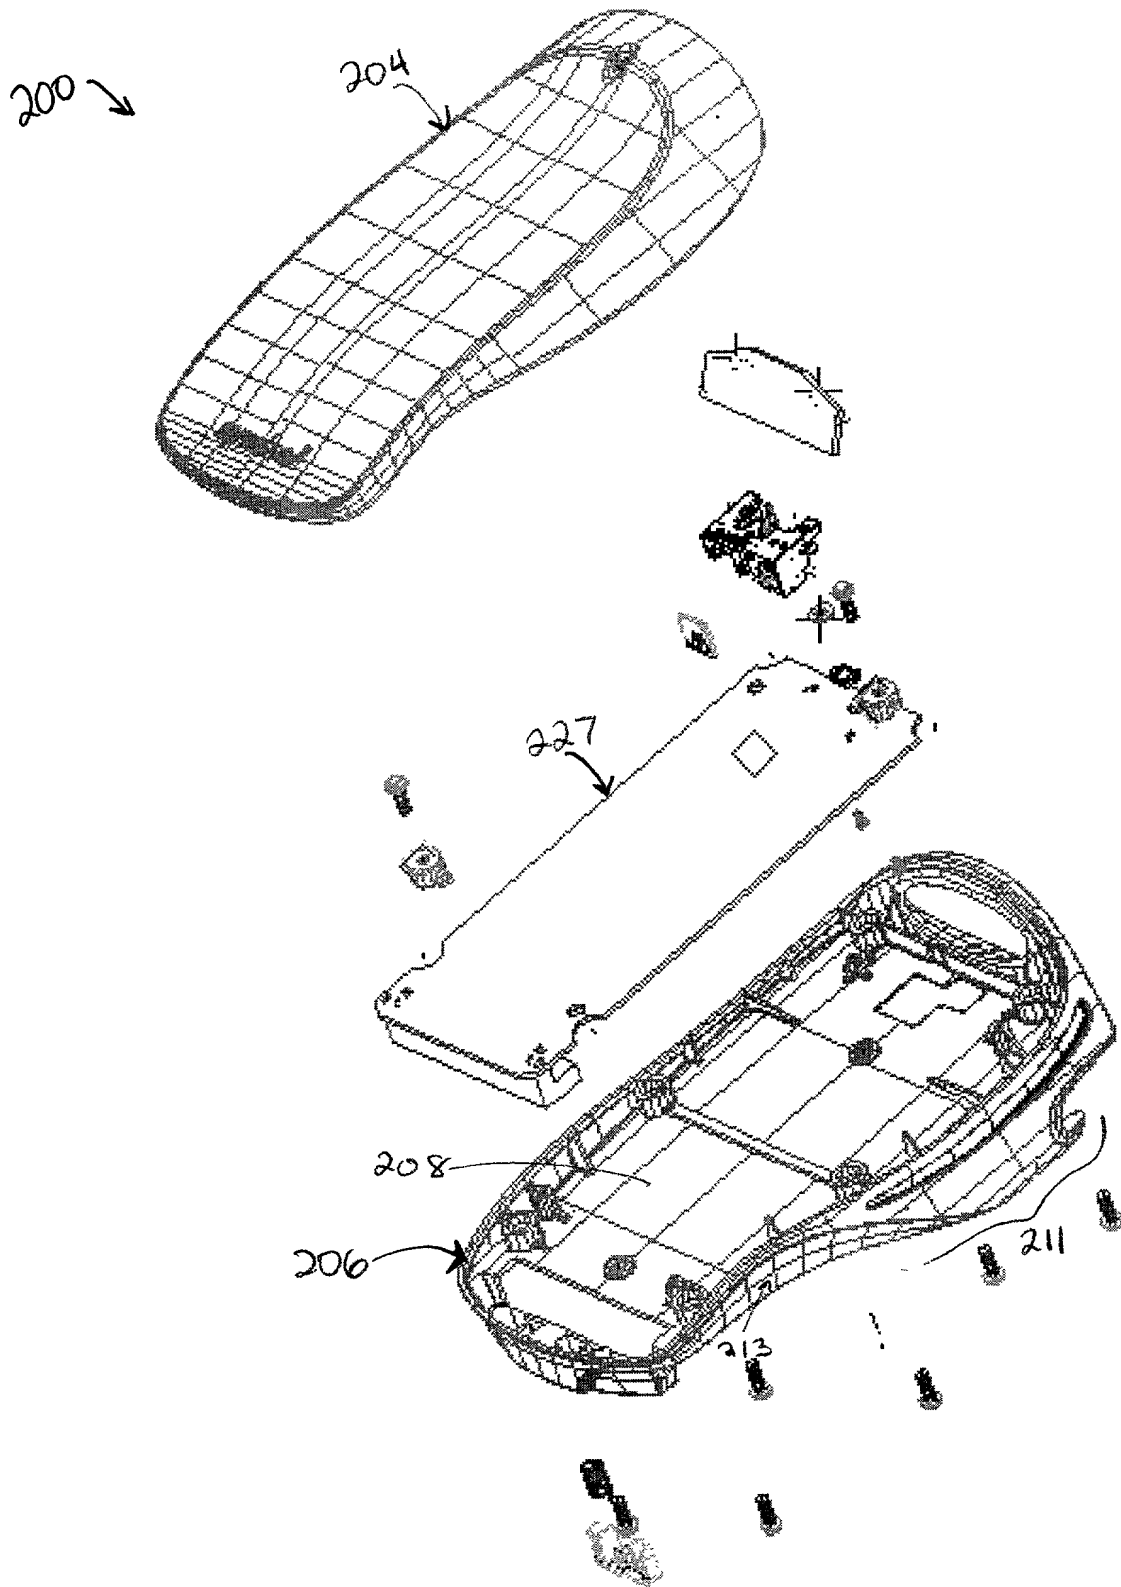


Fig 9

Fig. 10

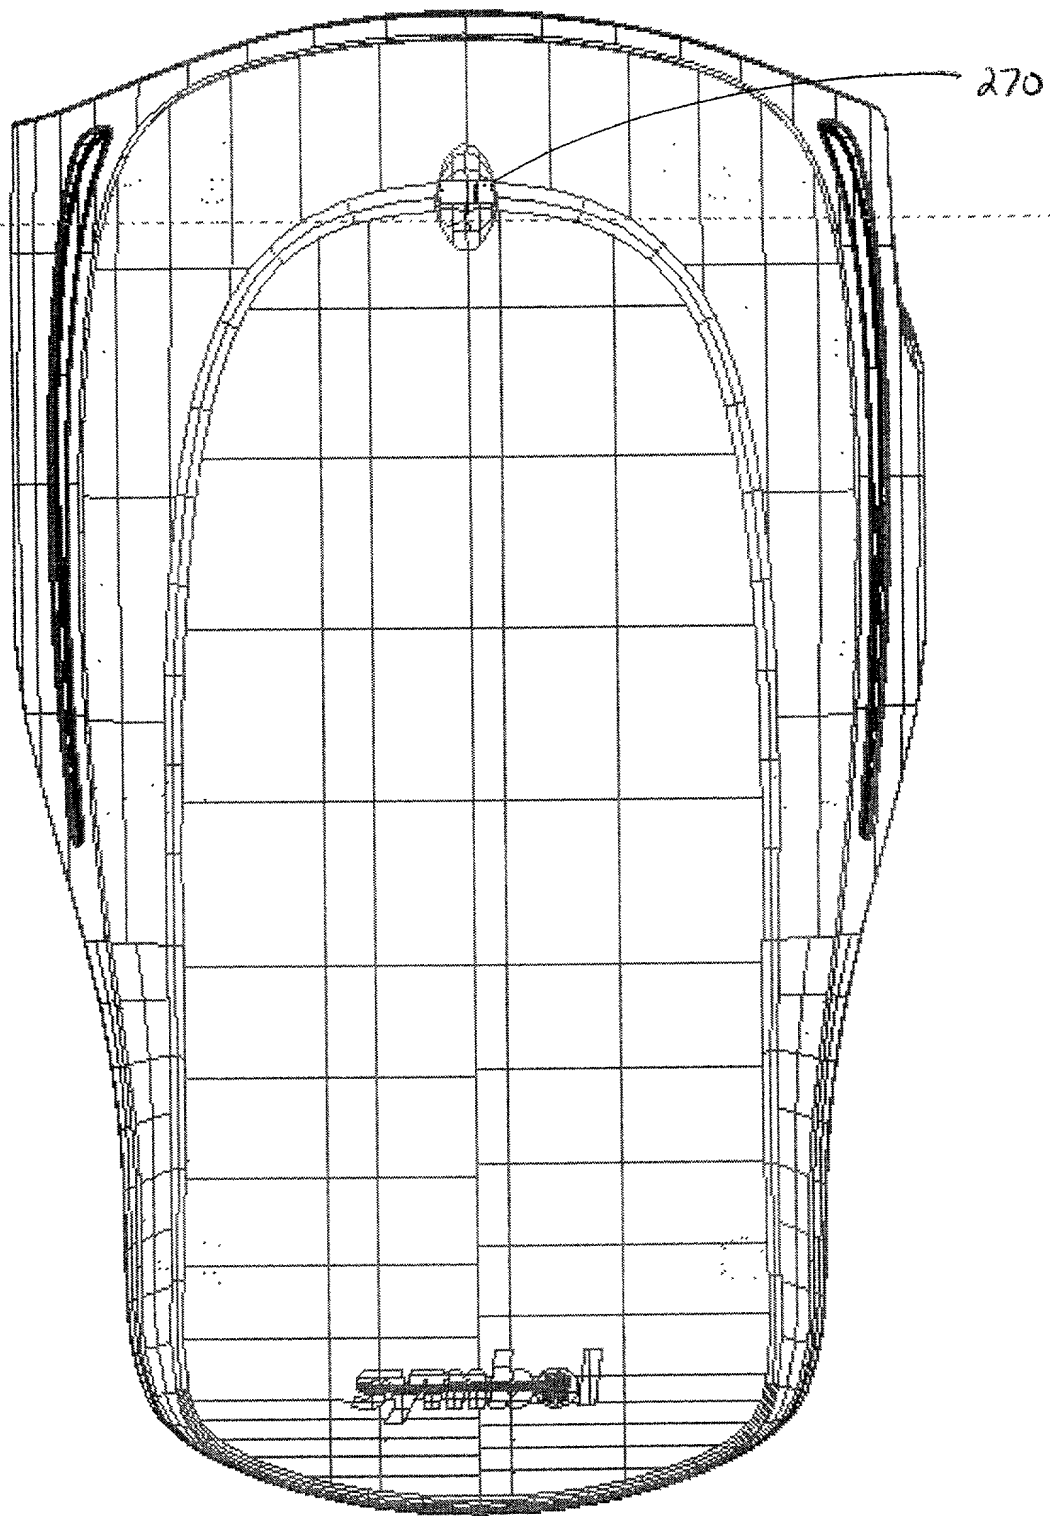


Fig-10

Fig 11

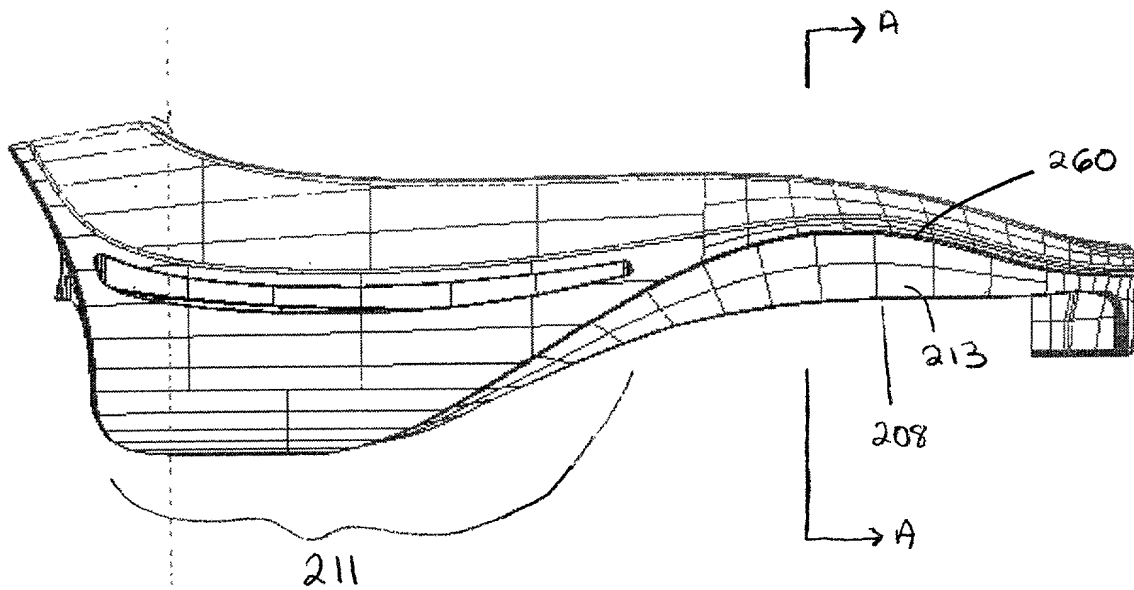


Fig 12

FIG. 12 is a perspective view of the structure of FIG. 11, showing the structure in a curved configuration.

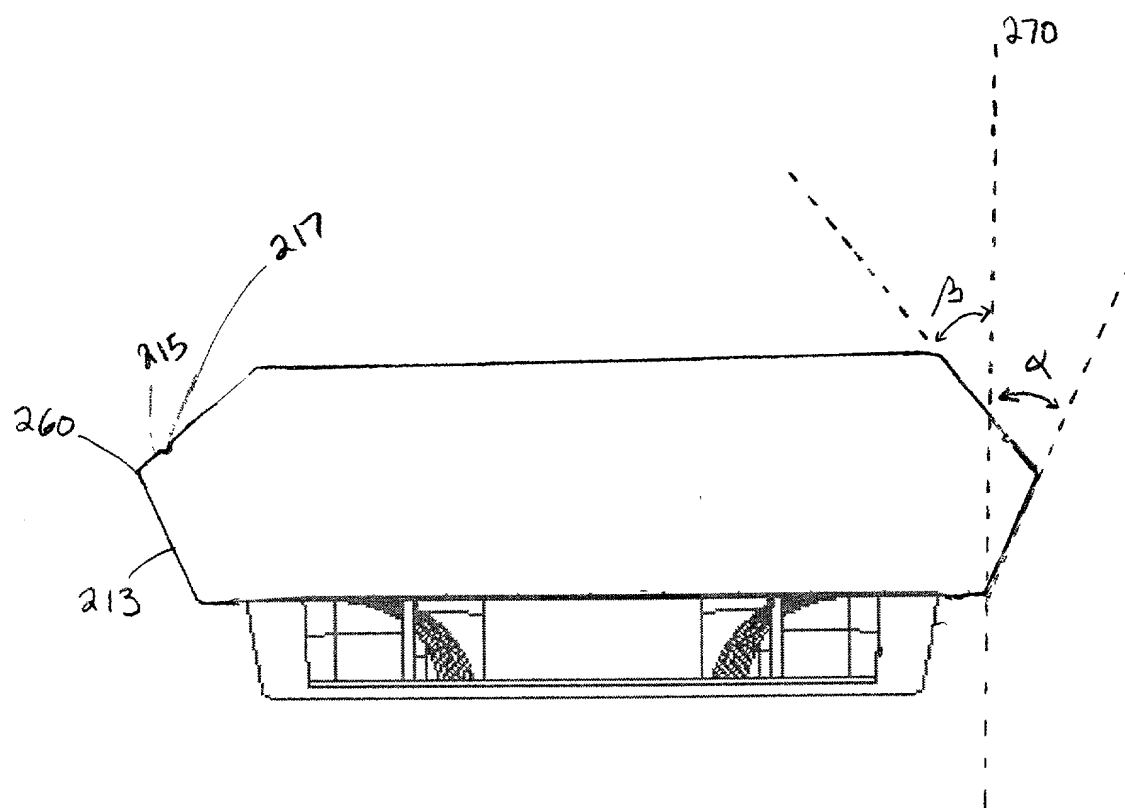


Fig. 13

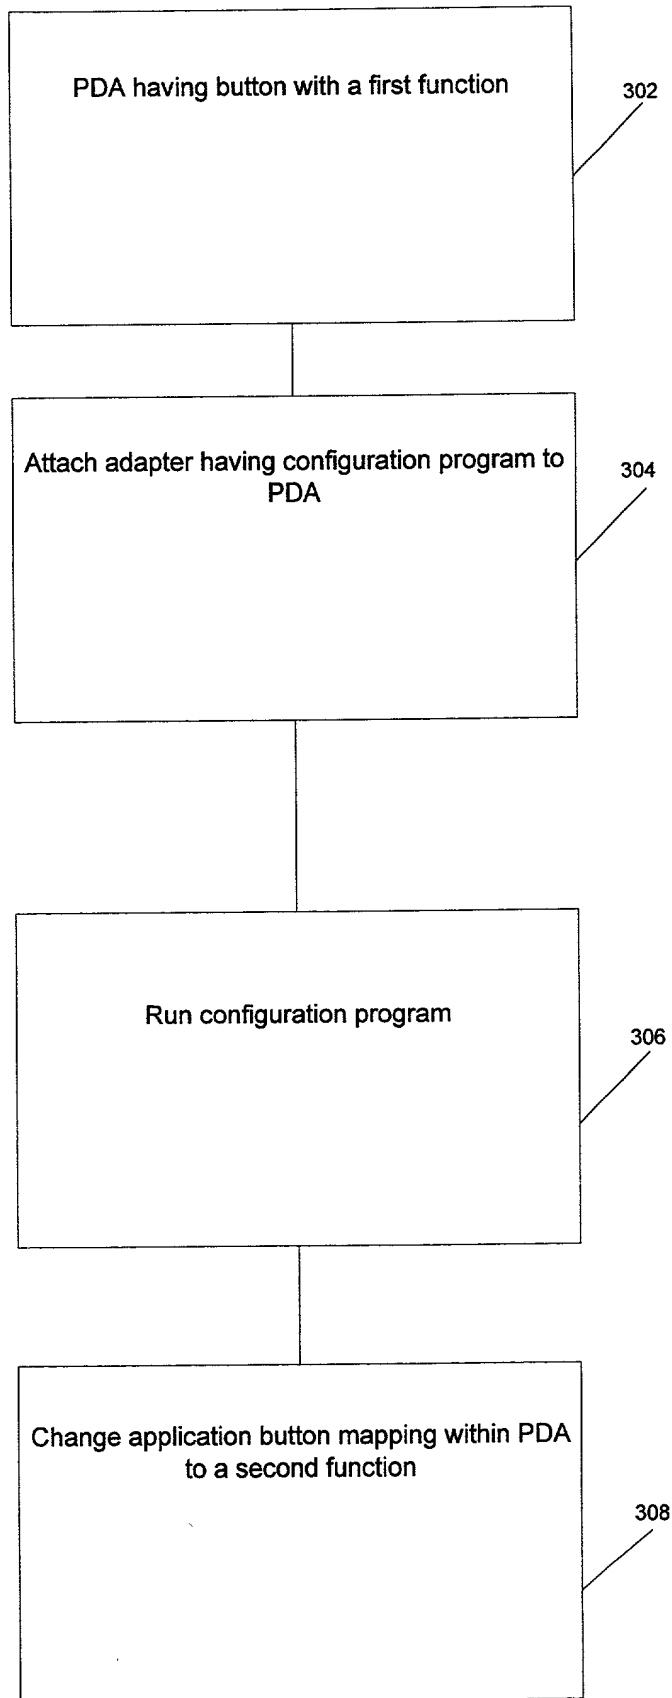


Fig. 14

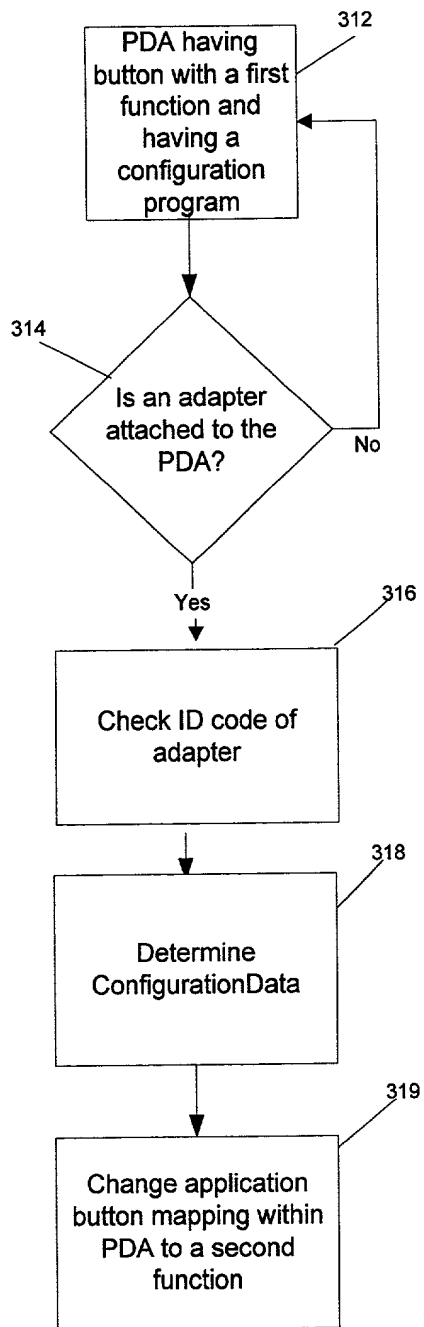


Fig. 15

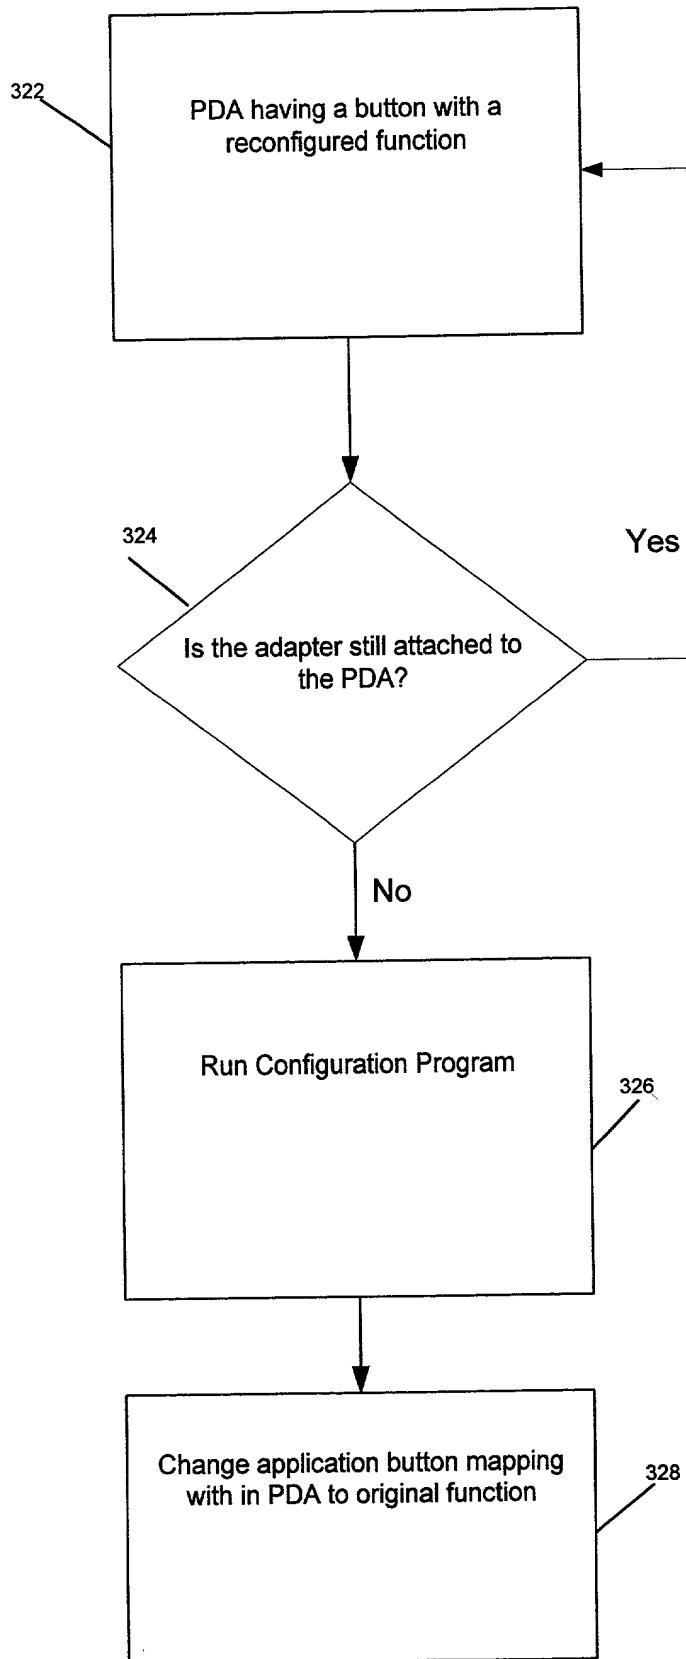


Fig. 16

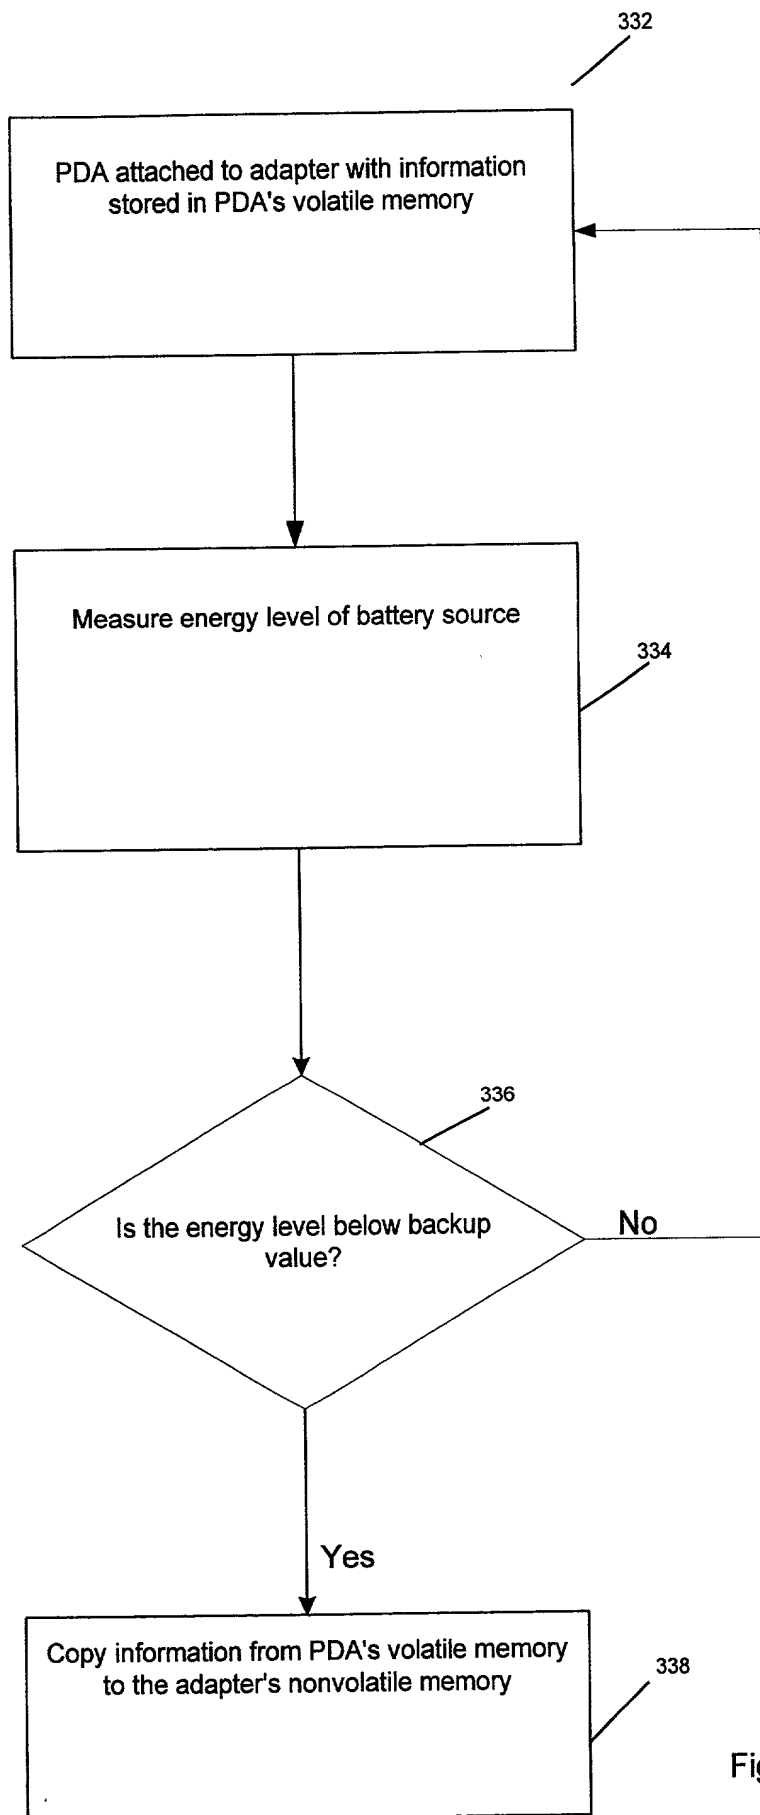


Fig. 17